

| A ID | B OD | C THK. | D HEIGHT | E JOINT HT. | F SPACING |
|------|------|--------|----------|-------------|-----------|
| 2108 | 2514 | 203 | 610 | 152 | 305 |
| 2108 | 2514 | 203 | 914 | 152 | 305 |
| 2108 | 2514 | 203 | 1219 | 152 | 305 |
| 2108 | 2514 | 203 | 1524 | 152 | 305 |
| 2108 | 2514 | 203 | 1829 | 152 | 305 |


| AVAILABLE HEIGHTS | QTY. OF RUNGS | STARCON LIFTING PINS | WEIGHTS [kg] |
|-------------------|---------------|----------------------|--------------|
| 0.61m [2'] | 1 | 8T | 2250 |
| 0.91m [3'] | 2 | 8T | 3350 |
| 1.22m [4'] | 3 | 8T | 4475 |
| 1.52m [5'] | 4 | 8T | 5600 |
| 1.83m [6'] | 5 | 8T | 6725 |

| | | | |
|----------|--------------|------------------------|--------|
| CONCRETE | RELEASE | MPa | 20 |
| | 28 DAY: | MPa | 35 |
| | AIR CONTENT: | 6% ± 1% | |
| | WEIGHT: | kg | VOLUME |
| STRAND | TYPE: | kg/m ³ 2402 | |
| | | mm | |
| | | MPa | |

| MARK | DESCRIPTION | QTY. |
|------|-------------|------|
| | | |
| | | |
| | | |
| | | |
| | | |



ISOMETRIC VIEW
NTS

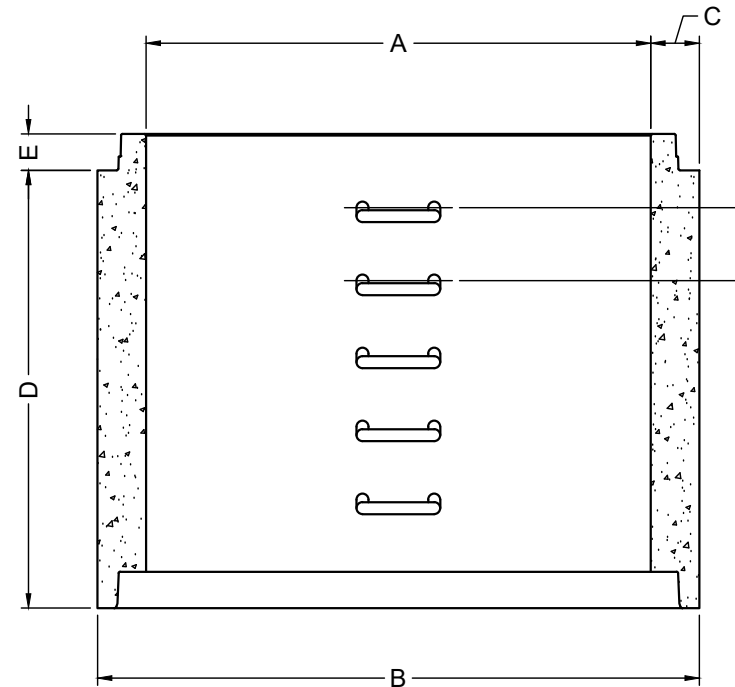

ELEVATION
VIEW



NOTES:

- 1) CEMENT : PORTLAND CEMENT TYPE 50(HS)
- 2) Max AGGREGATE SIZE: 20mm
- 3) 28 DAY STRENGTH: MIN. 35 MPa.
- 4) ENTRAINED AIR: 6%±1%
- 5) REINFORCING TO CAN/CSA-G30.18 400 MPa
- 6) ALL UNITS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.

| DWG. NO. | REFERENCE | NO.: | REVISION DESCRIPTION | BY | APP'D | DATE | DRW BY | SWM | 2018/11/21 |
|----------|-----------|------|----------------------|----|-------|------------|------------|--------------|------------|
| - | - | A | ISSUED PLAN | - | - | 2018/11/21 | CH'K BY | - | - |
| - | - | - | - | - | - | - | AP'D BY | - | - |
| - | - | - | - | - | - | - | AP'D BY | - | - |
| - | - | - | - | - | - | - | AP'D BY | - | - |
| - | - | - | - | - | - | - | SCALE: NTS | PAGE: 1 OF 1 | |

| | | |
|--------------|------------------------------|--|
| TITLE: | 2100 RISER DETAIL DRAWING | |
| PROJECT NO.: | JOB NO.: | |
| DRAWING NO.: | SVI-MR-2100-01A | |